
STANDARD CYLINDERS SINGLE ACTING

630 Series / 40 Bore 30 Rod

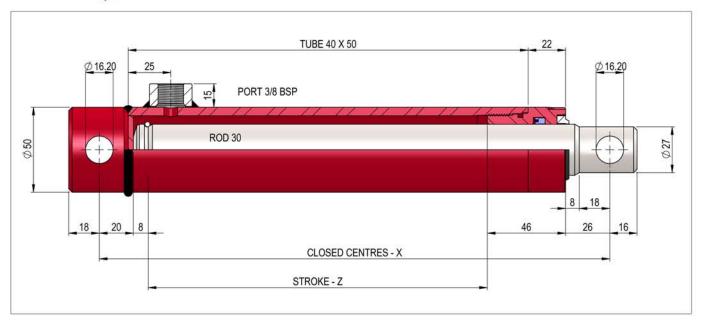

| Part No | 630/2 | 630/3 | 630/4 | 630/5 | 630/7 |
|-------------|-------|-------|-------|-------|-------|
| Z | 200 | 300 | 400 | 550 | 700 |
| X | 300 | 400 | 500 | 650 | 800 |
| Weight (Kg) | 3.6 | 4.8 | 5.9 | 7.5 | 9.2 |
| Vol (Ltr) | 0.25 | 0.35 | 0.45 | 0.65 | 0.80 |

Technical Data

-Max Working Pressure: 200 bar

-Proof Pressure: 300 bar -Maximum Speed: 0.5 m/s -Temperature: -30°C to 90°C

-Hydraulic Mineral Oil

Identification

-On The Tube: Reference + CH + Week/Year

Of Manufacture

Testing

-100% Tested By Pneumatic Pressure Drop Detection System

Protection

-Black Prime Finish

For Further Details Please Refer To

Technical Data Sheet.

