


SPECIAL CYLINDERS

Single Acting Displacement Telescopic

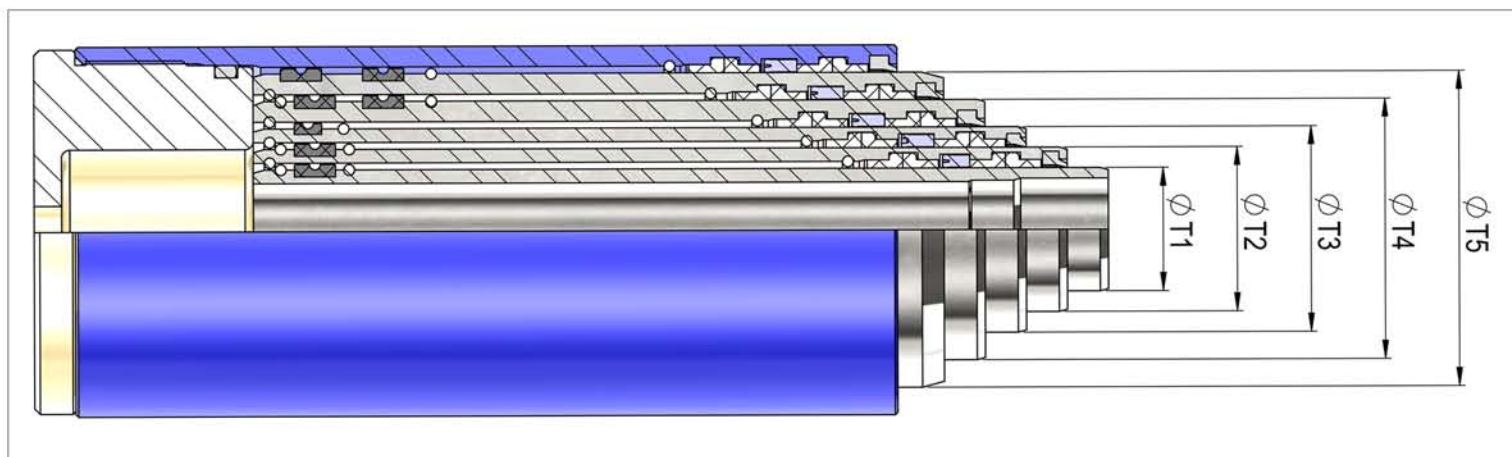

TUBE ϕ		THRUST AT 170 bar
T1	45	2,700 kg
T2	60	4,800 kg
T3	75	7,500 kg
T4	95	12,000 kg
T5	115	17,600 kg

Material: Chromed plated ST452-3 tube

Seals: Polyurethane

Max pressure: 170 bar

We can produce single acting displacement design telescopic cylinders to suit a variety of applications within the above tube nest range.

All our telescopic cylinders are 100% hydraulically tested.